



SOLID STATE INC.

46 FARRAND STREET
BLOOMFIELD, NEW JERSEY 07003

www.solidstateinc.com

MEDIUM-POWER COMPLEMENTARY SILICON TRANSISTORS


...designed for use as output devices in complementary general purpose amplifier applications.

FEATURES:


- * High Gain Darlington Performance
- * DC Current Gain $h_{FE} = 3500(\text{Typ}) @ I_C = 10 \text{ A}$
- * Monolithic Construction with Built-in Base-Emitter Shunt Resistor

PNP	NPN
MJ4030	MJ4033
MJ4031	MJ4034
MJ4032	MJ4035

16 AMPERE
COMPLEMENTARY
SILICON POWER
DARLINGTON TRANSISTOR
60-100 VOLTS
150 WATTS



TO-3



PIN 1.BASE
2.EMITTER
COLLECTOR(CASE)

DIM	MILLIMETERS	
	MIN	MAX
A	38.75	39.96
B	19.28	22.23
C	7.96	9.28
D	11.18	12.19
E	25.20	26.67
F	0.92	1.09
G	1.38	1.62
H	29.90	30.40
I	16.64	17.30
J	3.88	4.36
K	10.67	11.18


MAXIMUM RATINGS

Characteristic	Symbol	MJ4030	MJ4031	MJ4032	Unit
		MJ4033	MJ4034	MJ4035	
Collector-Emitter Voltage	V_{CEO}	60	80	100	V
Collector-Base Voltage	V_{CBO}	60	80	100	V
Emitter-Base Voltage	V_{EBO}	5.0			V
Collector Current-Continuous -Peak	I_C I_{CM}	16 20			A
Base Current	I_B	0.5			A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	150 0.857			W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	T_J, T_{STG}	- 65 to +200			$^\circ\text{C}$

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.17	$^\circ\text{C/W}$

FIGURE -1 POWER DERATING

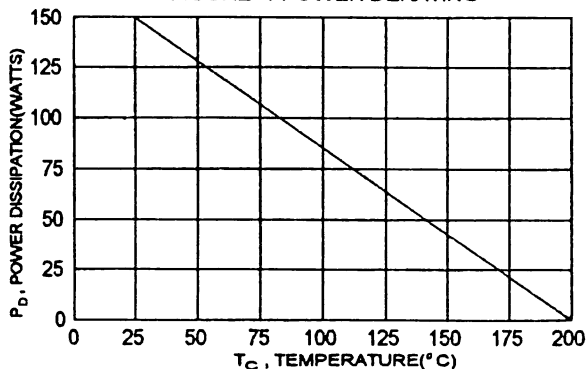

MJ4030, MJ4031, MJ4032 PNP / MJ4033, MJ4034, MJ4035 NPN

ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------



OFF CHARACTERISTICS

Collector - Emitter Sustaining Voltage (1) ($I_C = 100\text{ mA}$, $I_B = 0$)	MJ4030,MJ4033 MJ4031,MJ4034 MJ4032,MJ4035	$V_{CEO(sus)}$	60 80 100	V
Collector Cutoff Current ($V_{CE} = 30\text{ V}$, $I_B = 0$) ($V_{CE} = 40\text{ V}$, $I_B = 0$) ($V_{CE} = 50\text{ V}$, $I_B = 0$)	MJ4030,MJ4033 MJ4031,MJ4034 MJ4032,MJ4035	I_{CEO}	3.0 3.0 3.0	mA
Collector-Emitter Leakage Current ($V_{CE} = 60\text{ V}$, $R_{BE} = 1.0\text{k ohm}$) ($V_{CE} = 80\text{ V}$, $R_{BE} = 1.0\text{k ohm}$) ($V_{CE} = 100\text{ V}$, $R_{BE} = 1.0\text{k ohm}$) ($V_{CE} = 60\text{ V}$, $R_{BE} = 1.0\text{k ohm}$, $T_c = 150^\circ\text{C}$) ($V_{CE} = 80\text{ V}$, $R_{BE} = 1.0\text{k ohm}$, $T_c = 150^\circ\text{C}$) ($V_{CE} = 100\text{ V}$, $R_{BE} = 1.0\text{k ohm}$, $T_c = 150^\circ\text{C}$)	MJ4030,MJ4033 MJ4031,MJ4034 MJ4032,MJ4035 MJ4030,MJ4033 MJ4031,MJ4034 MJ4032,MJ4035	I_{CER}	1.0 1.0 1.0 5.0 5.0 5.0	mA
Emitter Cutoff Current ($V_{EB} = 5.0\text{ V}$, $I_C = 0$)		I_{EBO}	5.0	mA


ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 10\text{ A}$, $V_{CE} = 3.0\text{ V}$)	h_{FE}	1000		
Collector-Emitter Saturation Voltage ($I_C = 10\text{ A}$, $I_B = 40\text{ mA}$) ($I_C = 16\text{ A}$, $I_B = 80\text{ mA}$)	$V_{CE(sat)}$		2.5 4.0	V
Base-Emitter On Voltage ($I_C = 10\text{ A}$, $V_{CE} = 3.0\text{ V}$)	$V_{BE(on)}$		3.0	V

(1) Pulse Test: Pulse width = 300 us , Duty Cycle $\leq 2.0\%$

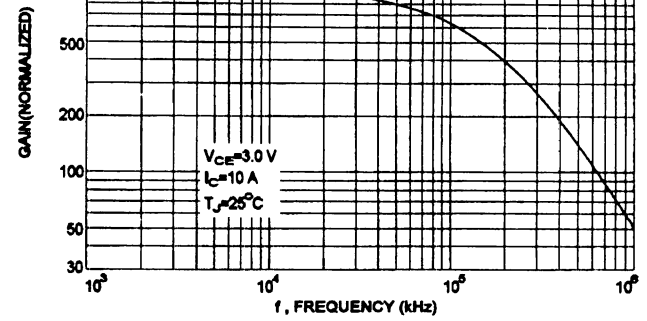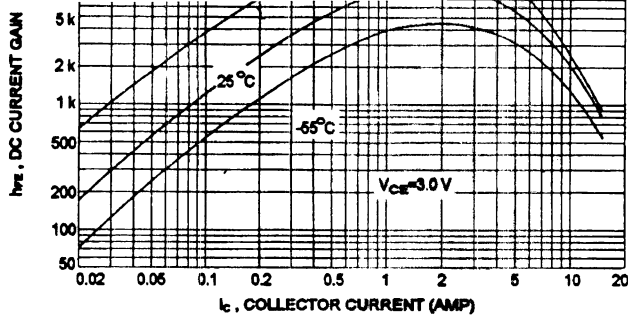

ACTIVE-REGION SAFE OPERATING AREA (SOA)

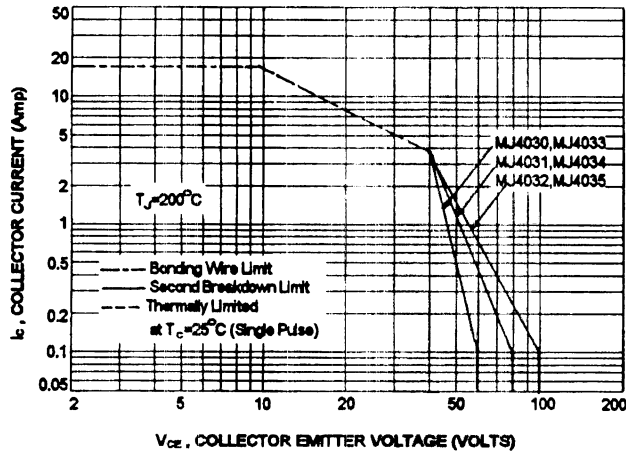

There are two limitation on the power handling ability of a transistor: average junction temperature and second breakdown safe operating area curves indicate I_C - V_{CE} limits of the transistor that must be observed for reliable operation i.e., the transistor must not be subjected to greater dissipation than curves indicate.

At high case temperatures, thermal limitation will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

"ON" VOLTAGE

